

# Optical Node Series (NC)

## DT4030E-01 Universal Digital Transceiver (5–50 MHz)

### FEATURES

- Digitizes 5–50 MHz legacy RF return
- Highly flexible, easily configurable support for transmission at 1310 nm, 1550 nm, 1 of 15 CWDM wavelengths, or 1 of 40 DWDM wavelengths
- Concatenated or point-to-point applications
- Remote status monitoring and management
- Hot plug in/out
- Available for both single and dual redundant rings with self-healing capabilities
- Fast Ethernet to single mode optical converter implemented with optional SFP transceivers
- Supports installation of two SFP transceiver modules (for Local and Network optical ports)
- Compliant with IEEE 802.1P, 802.1Q, 802.3u, VLAN, ToS



### PRODUCT OVERVIEW

ARRIS' DT4030E-01 Digital Transceiver is a component of ARRIS's Integrated Digital Transport System that combines two major functions into one compact package: digitization of legacy 5–50 MHz RF return path signals and an Ethernet Access Device. The DT4030E-01 transceiver digitizes the legacy RF return path and multiplexes native Ethernet traffic from the optical receiver port of a plug-in (SFP) transceiver module into the return transport system. By providing virtual pipes for Fast Ethernet services and legacy RF return on a single fiber, the DT4030E-01 Digital Transceiver alleviates fiber exhaustion, greatly simplifies the network and provides distinct time-to-market advantages in turning up new revenue bearing services, including voice, video and data services.

The DT4030E-01 transceiver supports both point-to-point and concatenated applications. For concatenated applications, multiple DT4030E-01s can be designed into a daisy-chained configuration. The module's optical transmit/receive ports are implemented with optional plug-in transceivers for ultimate flexibility and affordability. Conforming to the Small Form Factor Pluggable (SFP) Multisource Agreement, these state-of-the-art transceivers are available in a variety of transmit/receive wavelengths, including dedicated 1310 nm (for 10 and 40 km links), 1550 nm (for links up to 40 km), CWDM ITU grid (for links up to 60 km), and DWDM ITU grid (for links up to 120 km), all operating at data rates of 2.125 Gbps. Longer spans are supported by using ARRIS's DX4515 Digital Transponder.


The DT4030E-01 is designed as a plug-in module for ARRIS' NC2000 and NC4000 series Optical Nodes. ARRIS supplies DT4030E-01 transceivers either with these nodes as a fully configured and tested node or as modules that can be installed by customers.

SPECIFICATIONS	
Characteristics	Specification
<b>Physical</b>	
Dimensions	4.0" L x 1.8" H x 2.3" W (10.2 cm x 4.6 cm x 5.8 cm)
Weight	0.8 lbs (0.4 kg)
<b>Environmental</b>	
Operating Temperature Range	-40° to +85°C (-40° to 185°F)
Storage Temperature Range	-40° to +85°C (-40° to 185°F)
Humidity	5% to 95% non-condensing
<b>Power Requirements</b>	
Input voltage	<ul style="list-style-type: none"> <li>3.3 V<sub>DC</sub>: 875 mA max with 1 SFP installed 1100 mA max with 2 SFPs installed</li> <li>5 V<sub>DC</sub>: 360 mA max</li> </ul>
Power consumption	4.7 W max with 1 SFP installed 5.4 W max with 2 SFPs installed
<b>General</b>	
Hot plug-in/out	
Optical interface connectors	LC Duplex on SFP
Optical transmission bit rate	2.125 Gb/s
Modes of operation	<p>A Standard 12-bit chain with input payload added from Network Rx port of SFP; Local Rx port of SFP activated for interface to other ARRIS equipment (e.g., OE1110 or DS loop)</p> <p>B Start (head) module of a 12-bit chain of DTs - strips any input payload from the Network Rx port</p> <p>C Accepts two synchronized 12-bit chains at the Network and Local Rx ports of the SFPs; adds local RF to payload at Local port and sends in Channel A (10-bit format); payload at Network port re-sends in Channel B (10-bit format). (Requires a "2-fer" dual digital receiver at receiving hub/headend.)</p> <p>NOTE: Transceivers are shipped from the factory in operational mode "A."</p>
<b>RF Path and Distortions</b>	
Pass band	5–50 MHz
	NOTE: The DT4030E-01 is a 5–50 MHz passband device. In systems operating with a lower cutoff frequency for the return spectrum, the actual passband is determined and controlled through the use of Diplexers and Low Pass Filters that precede the transceiver.
Frequency response	± 0.5 dB
Input return loss, min	16 dB
Level stability	± 0.5 dB
System minimum full gain	28 dB
Loading, nominal	5–40 MHz (QPSK carriers or equivalent Gaussian noise)
Input, nominal	-60 dBmV/Hz
Dynamic range	<ul style="list-style-type: none"> <li>In Mode A or B, @ 47 dB CNR: 11 dB (single link)</li> <li>In Mode C, @ 40 dB CNR: 11 dB (single link)</li> </ul>
Peak NPR	<ul style="list-style-type: none"> <li>In Mode A or B: 53 dB</li> <li>In Mode C: 48 dB</li> </ul>

## SPECIFICATIONS

Characteristics	Specification
<b>Optical</b>	
<i>The Local and Network optical port facilities of the DT4030E-01 can be populated with a variety of SFP (plug-in) transceivers depending on the network application. Please refer to the appropriate data sheets for the selected transceivers for detailed specifications. Following is a summary of available transceiver options (model numbers and brief descriptions) for these ports.</i>	
2.125 Gbps SFP Transceiver Options	<ul style="list-style-type: none"> <li>TR4000-PI (transmit at 1310 nm for links up to 10 km)</li> <li>TR4040-PI (transmit at 1310 nm for links up to 40 km)</li> <li>TR4540-0000-PI (transmit at 1550 nm for links up to 40 km)</li> <li>TR4440B-xxxx-PI (transmit at CWDM wavelength of xxx = 1270, 1290, . . . , 1350 or 1430, 1450, 1470, . . . , 1610 nm for links up to 60 km)</li> <li>TR4580-xx-PI (transmit at 1 of 40 DWDM wavelengths for links up to 120 km) (Note: Longer distances can be achieved with the use of an ARRIS Dispersion Compensation Module and/or DWDM transponders in the return path. EDFAs can also be used to extend the link budget.)</li> </ul>
<b>LED Indicators (for SFP optical ports)</b>	
TX: Green ON = OK; OFF = bad SFP or unit not powered RX: Green ON = signal good; OFF = LOS asserted; Blinking = high BER (excessive bit error rate)	
For mode of operation (A, B, or C)	3 LEDs (green LED illuminated to indicate current mode)

## ORDERING INFORMATION

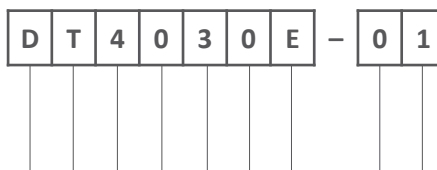

### Transceiver Plug-in Modules

SFP modules must be ordered separately. Please refer to the above list of available transceivers and appropriate data sheets for specific complete model numbers and ordering information.

## RELATED PRODUCTS

NC4000 Optical Node	Optical Patch Cords
NC2000 Optical Node	Optical Passives
Fiber Service Cable	Installation Services

## Customer Care

Contact Customer Care for product information and sales:

- United States: 866-36-ARRIS
- International: +1-678-473-5656

**Note:** Specifications are subject to change without notice.

**Copyright Statement:** ©ARRIS Enterprises, LLC, 2016. All rights reserved. No part of this publication may be reproduced in any form or by any means or used to make any derivative work (such as translation, transformation, or adaptation) without written permission from ARRIS Enterprises, LLC (“ARRIS”). ARRIS reserves the right to revise this publication and to make changes in content from time to time without obligation on the part of ARRIS to provide notification of such revision or change. ARRIS and the ARRIS logo are registered trademarks of ARRIS Enterprises, LLC. Other trademarks and trade names may be used in this document to refer to either the entities claiming the marks or the names of their products. ARRIS disclaims proprietary interest in the marks and names of others. The capabilities, system requirements and/or compatibility with third-party products described herein are subject to change without notice.