

Optical Node Series (NC)

VT4250

Universal VHub Monitor/Manager and Digital Return Transceiver

FEATURES

- Designed for NH4000-UVP, NH4000-VHP, and NH4000-RFP/CNP platforms, providing integrated Monitoring/Management and Digital Return Transceiver functions in a single-wide module
- Replaces OE4130S NH4000-VHP Monitoring/Management Module, supporting “no RF” applications
- Managed via the Headend NI3030x Network Interface, or sends RF and platform monitoring data via the DR3450N or legacy DR3xxx Return Receiver
- Operates in 3 RF bandwidth ranges: 5-50 MHz, 5-75 MHz, or 5-100 MHz (firmware selectable)
- User selectable single/dual “1-fer” or “2-fer” channel links
- Optical transmission at 1310 nm, 1550 nm, 1 of 15 CWDM, or 1 of 40 DWDM wavelengths
- Compatible with existing DT4250 digital return platform installations including cascaded or point to point applications
- Supports a variety of configurations including new and add-on to legacy DT4250 based NC4000 RFoG and Fiber Deep installations



PRODUCT OVERVIEW

The VT4250N transceiver is an integral component of ARRIS’s latest generation Digital Return Platform, enabling the monitoring and management of modules installed in the VHub/UVHub, while providing the same digital return capabilities as the widely deployed ARRIS DT4250 return transceiver. The VT4250N digitizes one or two discrete RF return path signals from separate inputs and transmits optically to the Headend. The VT4250N optical transmit and receive ports are implemented with plug-in transceivers for ultimate flexibility and affordability.

Conforming to the Small Form Factor Pluggable (SFP) Multisource Agreement, these state-of-the art transceivers are available in a variety of transmit/receive wavelengths including dedicated 1310 nm and 1550 nm, CWDM (15 wavelengths), and DWDM (40 wavelengths). Three data rate options are available: 2.125, 3.1875, or 4.250 Gbps, with selection being dependent upon bandwidth and transceiver configuration. RF return bandwidths are 5-45 MHz, 5-65 MHz, and 5-85 MHz.


For RF return applications, the transceiver can operate in single channel (“1-fer”) or in dual channel/dual segment (“2-fer”) mode. A simple switch on the unit enables the operator to select the operating mode and bandwidth. In “2-fer” mode, two discrete return channels are independently digitized with the two data streams being transmitted by a single SFP optical transceiver on a single wavelength. At the Headend or hub, the ARRIS DR3450N Digital Return Receiver separates and decodes the two channels and routes each through discrete RF return outputs. For monitoring, the VT4250N Transceiver combines the UVHub, VHub, or NC4000 node module monitoring information with the upstream RF data, which is separated by the Digital Receiver, where it can be viewed through the CH3000 Opti-Trace™ software. When using the NI3030 Network Interface controller in the Headend, remote management/configuration of installed modules within the UVHub, VHub, or Node is supported.

The output from the VT4250 can be cascaded to a new or existing DT4250 module in a tandem or primary node, enabling remote monitoring of multiple nodes and VHubs/UVHubs with a single digital receiver, thus maximizing fiber-efficiency with up to 80 returns plus node monitoring and management on a single fiber. For non-RF/Fiber Deep applications where monitoring or management is needed, the VT4250 features a user settable “non-RF” mode that enables the transceiver to either cascade to an NC4000/DT4250 platform for communication of node data to the Headend DR3450 Receiver, or otherwise communicate node data directly to the Headend Receiver. The device also supports legacy single-mode DR3xxx Receivers. “Monitoring Only” functionality is set by putting the device into the 50 MHz 0-fer (N-50-0) mode with no active return RF.

ARRIS digital return products enable existing optical nodes to be fully segmented, with each RF input port treated as a discrete network. This maximizes available bandwidth per user, while at the same time conserving the cable operators’ investment in the fiber network.

The VT4250 can be used in NH4000-UVPx Universal VHubs, NH4000-VHP VHubs, and NH4000-RFP/CNP platforms, and in a variety of cascaded configurations.

The VT4250 must be installed in Slot A in every installation of any platform.

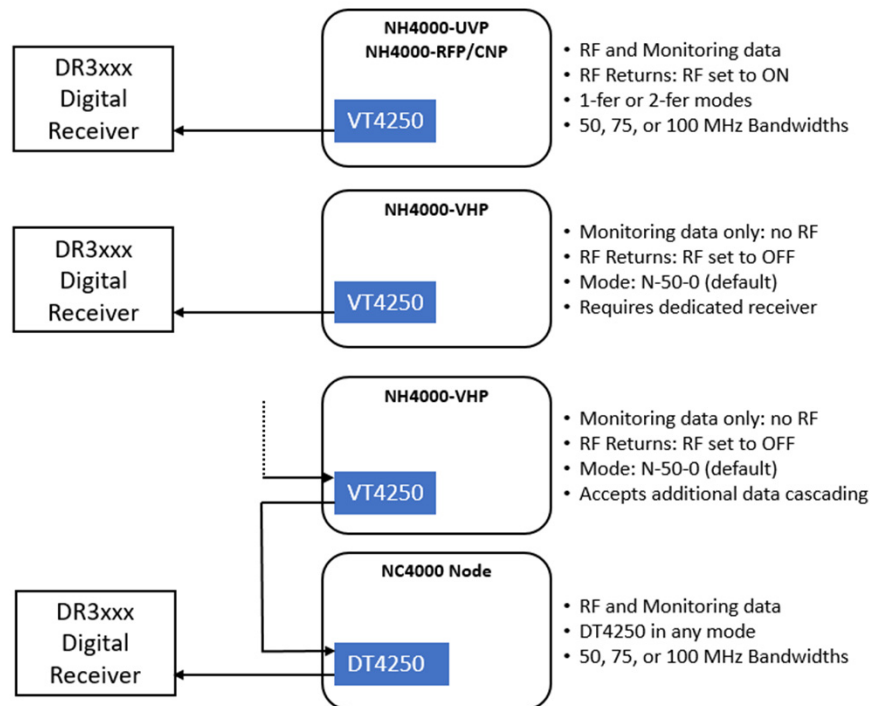

SPECIFICATIONS

Characteristics	Specification		
Physical			
Dimensions	4.0" L x 1.8" H x 2.3" W (10.2 cm x 4.6 cm x 5.8 cm)		
Weight	0.8 lbs (0.4 kg)		
Micro USB port for firmware update and local management			
Environmental			
Operating temperature range	-40° to +85°C (-40° to 185°F)		
Storage temperature range	-40° to +85°C (-40° to 185°F)		
Humidity	5% to 95% non-condensing		
Power Requirement			
Input voltage	24 V _{DC} (from node internal power supply)		
Module power consumption	4 W		
SFP power consumption (max)	2 W		
General			
Hot plug-in/out			
Optical interface connectors	LC/UPC Duplex on the SFP transceiver		
Optical transmission bit rates	2.125 Gbps, 3.1875 Gbps, 4.250 Gbps, depending on the configuration		
Number of RF channels	1 or 2, or RF Off (no RF, platform monitoring only). Manually selectable on module, or using Opti-Trace CMS.		
Mode selection	Via the on-board push-button on the module, or using Opti-Trace CMS via micro USB port		
RF Path and Distortions (each channel)			
Frequency response	± 0.5 dB		
Input return loss, min	16 dB		
Level stability	± 0.5 dB		
RF Path Loading			
	5 - 50 MHz	5 - 75 MHz	5 - 100 MHz
Operation Mode	"1-fer" "2-fer"	"1-fer" "2-fer"	"1-fer" (1) "2-fer" E: NA
SFP Data Rate (Gbps)	2.125 2.125	2.125 3.1875	2.125 4.250 NA
Isolation between channels (in dB), (Includes RX)	NA > 60	NA > 60	> 55 > 55 NA
Input Nominal dBmV/Hz	-60 > 47 dB NPR	-60 > 40 dB NPR	-62 > 40 dB NPR
Dynamic range (in dB)	> 11 @47 dB NPR	> 11 @40 dB NPR	> 11 @40 dB NPR
Peak NPR (in dB)	54	49	48 48 NA
Optical			
<i>The optical ports facility of the VT4250X-XX can be populated with a variety of SFP (plug-in) transceivers depending on the network application, supporting 2.125, 3.1875, and 4.250 Gbps data rates. The data rates depend on the configuration and specific RF Range selected. Please contact ARRIS Sales to review the available SFP transceivers and obtain the appropriate data sheets for the required application.</i>			
LED Indicators			
Operating Mode	N: Normal (E-Enhanced mode not available on VT4250) 50, 75, or 99; Upstream bandwidth 5-50, 5-75, or 5-100 MHz 1 or 2: Single ("1-fer") or 2 channel ("2-fer"), user selectable. N-50-0 or N-75-0 (RF Off) mode "1" and "2" LEDs will be dark (off) in the N-50-0 or N-75-0 RF Off mode. N-50-0 or N-75-0 setting is the factory default setting (device dependent). Note: 100 MHz operation in 1-fer mode supports 2x single returns but requires a second SFP (2.125 Gbps)		
SFP Status	Tx; Green ON = OK, Off = faulty SFP or unit not powered Rx; Green ON = Signal good, Off = LOS (Loss of Signal) Blinking = excessive BER (Bit Error Rates)		

ORDERING INFORMATION

Model Number	Description
VT4250N-50-00	Supplied with 5-50 MHz and 5-100 MHz firmware pre-loaded
VT4250N-75-00	Supplied with 5-65 MHz and 5-100 MHz firmware pre-loaded

Transceiver Plug-in Modules:

SFP modules must be ordered separately.

Please contact ARRIS Sales to review the available SFP transceivers and obtain the appropriate data sheets for the required application.

RELATED PRODUCTS

NH4000-UVP1/UVP2 UVHub	DT4250N Universal Digital Transceiver
NH4000 VHP, NH4000- RFP/CNP, NC4000	DR3xxx Digital Receivers
OR4xxx RF Return Receivers	SFP Transceivers

Note: Specifications are subject to change without notice.

Copyright Statement: ©ARRIS Enterprises, LLC, 2018. All rights reserved. No part of this publication may be reproduced in any form or by any means or used to make any derivative work (such as translation, transformation, or adaptation) without written permission from ARRIS Enterprises, LLC ("ARRIS"). ARRIS reserves the right to revise this publication and to make changes in content from time to time without obligation on the part of ARRIS to provide notification of such revision or change. ARRIS and the ARRIS logo are registered trademarks of ARRIS Enterprises, LLC. Other trademarks and trade names may be used in this document to refer to either the entities claiming the marks or the names of their products. ARRIS disclaims proprietary interest in the marks and names of others. The capabilities, system requirements and/or compatibility with third-party products described herein are subject to change without notice.

1511152_RevC_VT4250-Univ-Dual-RF-Input-Transceiver

02/2018 ECO13681

Ask us about the complete Access Technologies Solutions portfolio:

Optical Node-VT4250