

Cue Router




The ARRIS Cue Router enables broadband services providers to insert advertising spots into broadcast streams that do not have SCTE 35 cueing messages. Cue Router serves the need of having source cues and a means to deliver them to needed channels. The Cue Router receives cues from ad servers (sources) that extract them from a network broadcast and forwards them to other ad servers (destinations). This enables broadband service providers to increase revenue by inserting advertising into channels that previously could not support ad insertion.

HIGHLIGHTS

- Enhances system fault tolerance by providing redundant cue sources
- Enables local ad insertion on a channel that does not include local ad cues by replicating existing cues and inserting them into the channel
- Supports blackout broadcasts
- Replaces ToneSender software
- Serves a number of sites at a central location and is not needed at each Headend
- There can be up to 3 Cue Routers in an ARRIS ad insertion system
- Detects if a cue source, such as Scout DTMF Cue Tone Sender, is out of contact and attempts to restore communications periodically until the connection is reestablished.


Cue Router Redundancy

Cue Router 1 (CR01) is receiving cue request messages from an analog ad insertion server. The analog insertion server is getting cues from an MDS445 switch. CR01's receiver process gets the cues by listening to a user-configured port on the cuerouter server. CR01's sender process then passes the cues through its destination port to any Headend ad insertion servers that are configured to listen to that destination port. In this case, CR01 is serving both an analog insertion server running HE Kit 2.9 and an ACM GigE Digital Program Insertion server. Cue Router 2 (CR02) is receiving cues from a digital DVB-ASI Headend insertion server that is getting embedded cues from a digital broadcast stream by way of a splicer. In this case, the digital cues are sent to a ACM 2.0 Headend insertion server. Digital cues could also be sent to another DVB-ASI digital Headend insertion server or an analog Headend.

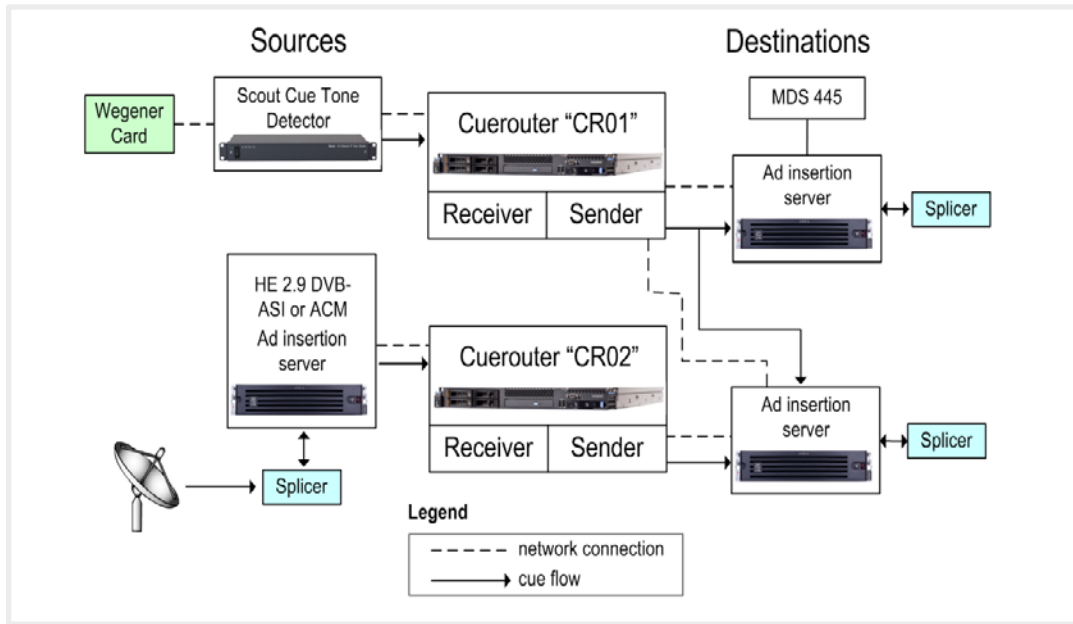

Cue Router Broadcast Blackouts

On a network level, you can configure Cue Router to override cue acceptance from specified sources. Suppose the ACM insertion server is configured to accept cues from Cue Router CR01 as its default source, but has CR02 available as an alternate for ESPN cues. If ESPN were broadcasting a sporting event that was blacked out for the area served by CR01, 2.9 or ACM Headend would receive ESPN cues from CR02 outside of the blackout area.

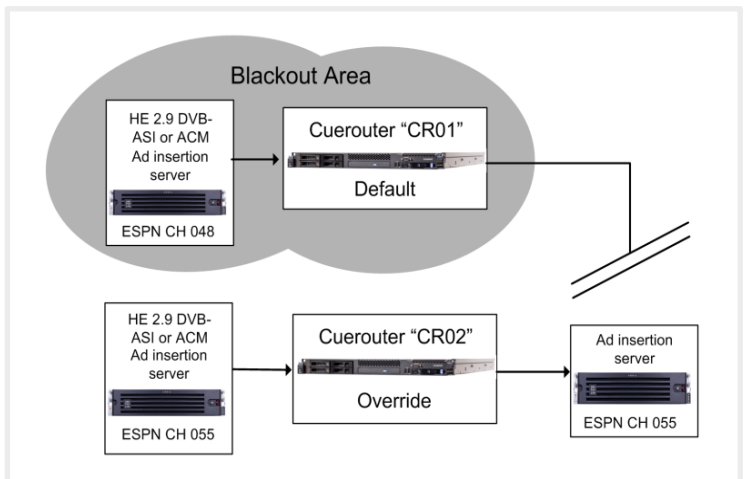

ORDERING INFORMATION

Part Number	Description
741370	(CUE-ROUTER-L) Network Cue Distribution Software - Linux/ASK Version

Copyright Statement: ©ARRIS Enterprises, Inc. 2014 All rights reserved. No part of this publication may be reproduced in any form or by any means or used to make any derivative work (such as translation, transformation, or adaptation) without written permission from ARRIS Enterprises, Inc. ("ARRIS"). ARRIS reserves the right to revise this publication and to make changes in content from time to time without obligation on the part of ARRIS to provide notification of such revision or change. ARRIS and the ARRIS logo are all trademarks of ARRIS Enterprises, Inc. Other trademarks and trade names may be used in this document to refer to either the entities claiming the marks and the names of their products. ARRIS disclaims proprietary interest in the marks and names of others.