

Optical Passives (OSP)

OP94M5x, OP94D5x

5-channel CWDM Multiplexer and Demultiplexer Field Passives


FEATURES

- 15 CWDM wavelengths in 3 groups of 5
- Designed for use with uncooled lasers based on 20 nm channel spacing
- Flat and wide operating passband on CWDM ITU grid (20 nm spacing)
- High channel isolation to minimize crosstalk
- Low polarization dependent loss (PDL)
- Operating temperature range -40° to $+85^{\circ}\text{C}$
- Telcordia GR-1209 and GR-1221 qualified, providing excellent environmental and mechanical stability
- Ability to cascade and combine all 3 groups
- Variety of options for fiber and connector types
- Epoxy-free on optical path
- Optional integrated 1310 nm combiner/splitter



PRODUCT OVERVIEW

ARRIS's OP94M5x and OP94D5x series 5-channel CWDM field passives are designed to multiplex and demultiplex 5 CWDM ITU-grid optical wavelengths. The OP94M5x and OP94D5x modules function similarly and are available in three channel groups ("Very Low" from 1270 to 1350 nm, "Low" from 1430 to 1510 nm, or "High" from 1530 to 1610 nm). The 5-channel modules also include an additional port for cascading the "Low" and "High" channel groups where needed. All of these ruggedized modules have been designed for use in an outdoor environment within a temperature range of -40° to $+85^{\circ}\text{C}$.

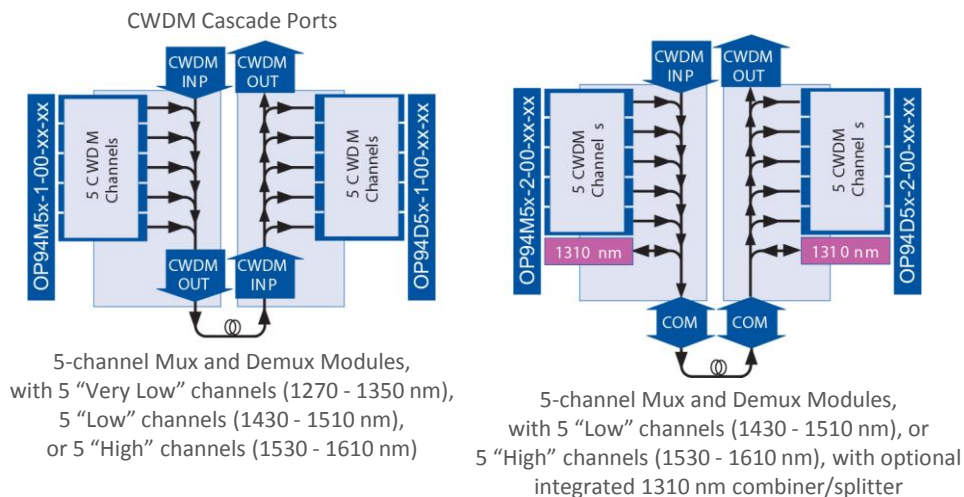

SPECIFICATIONS

Characteristics	Specification	
Physical		
Dimensions	3.8” L x 3.0” W x 0.3” H (9.7 cm x 7.6 cm x 0.8 cm)	
Weight	0.8 lb (0.4 kg)	
Environmental		
Operating Temperature Range	-40°C to +85°C (-40°F to +185°F)	
Storage Temperature Range	-40°C to +85°C (-40°F to +185°F)	
Humidity	5% to 95% non-condensing	
Optical		
Channel spacing	20 nm	
Return loss, min	45 dB	
Passband @ 0.5 dB	± 6.5 nm	
Ripple within passband	0.5 dB	
Polarization dependent loss, max	0.15 dB (< 0.1 dB typ)	
Power handling, max (any input port)	21.8 dBm	
Wavelengths in channel groups	V (1270, 1290, 1310, 1330, and 1350 nm) L (1430, 1450, 1470, 1490, and 1510 nm) H (1530, 1550, 1570, 1590, and 1610 nm)	
Insertion losses ¹ , max (dB)	OP94M5x (5-channel Mux)	OP94D5x (5-channel Demux)
Ch xxxx INP to COM	1.7 (1.9)	N/A
COM to Ch xxxx OUT	N/A	1.7 (1.9)
1310 to COM	1.1 (1.3)	1.1 (1.3)
CWDM INP to COM	2.0 (2.2)	N/A
COM to CWDM OUT	N/A	2.0 (2.2)
Paired insertion loss ²	3.0 (3.2)	3.0 (3.2)
CWDM Directivity, min (dB)	55	N/A
Channel isolation, min (dB)	N/A	
Adjacent channels	N/A	
Non-adjacent channels	N/A	
Passband for 1310 nm @ 0.5 dB (nm)	1263.5-1357.5	1263.5-1357.5
1310 Directivity, min (dB)	65	65
1310-COM isolation, min (dB)	60	60

SPECIFICATIONS CONTINUED


Characteristics	Specification
Optical Interface	
Optical connectors	SC/APC or none <i>(See Ordering Information)</i>
Model OP94M5x-1-00-yy-zz <i>(5-channel mux modules)</i>	<ul style="list-style-type: none"> CWDM OUT (output to fiber network) CWDM INP (input from cascaded CWDM group) Ch xxxx INP (5 channels added for selected channel group)
Model OP94M5x-2-00-yy-zz <i>(5-channel mux modules with 1310 combiner)</i>	<ul style="list-style-type: none"> COM (output from fiber network, I/O to/from network for 1310) CWDM INP (input from cascaded CWDM group) Ch xxxx INP (5 channels added for selected channel groups) 1310 (input/output to/from fiber network for 1310 nm)
Model OP94D5x-1-00-yy-zz <i>(5-channel demux module)</i>	<ul style="list-style-type: none"> CWDM INP (input from fiber network) CWDM OUT (output to cascaded CWDM group) Ch xxxx OUT (5 channel drops for selected channel group)
Model OP94D5x-2-00-yy-zz <i>(5-channel demux modules with 1310 nm splitter)</i>	<ul style="list-style-type: none"> COM (input from fiber network, I/O to/from network for 1310) CWDM OUT (output to cascaded CWDM group) Ch xxxx OUT (5 channel drops for selected channel group) 1310 (input/output to/from fiber network for 1310 nm)

NOTES:


¹ Insertion losses shown without (and with) connectors, assuming -2 version.

² Paired insertion loss when combined with corresponding applicable 5-wavelength demux module (from Ch xxxx INP to Ch xxxx OUT)

A 1310 nm I/O Port is provided on "L" and "H" models only. For cases in which a cascade of CWDM wavelengths that includes the 5 Very Low ("V") wavelengths is required, this port may be used to add those 5 wavelengths from the OUT port of a "V" model mux; see diagrams at right.

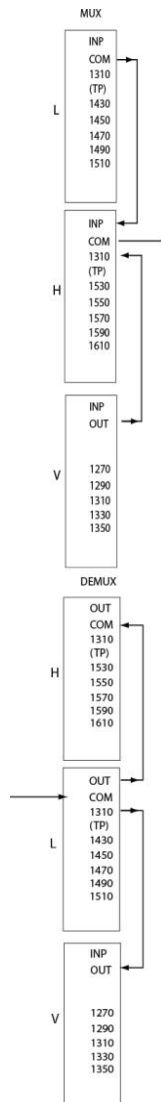

ORDERING INFORMATION

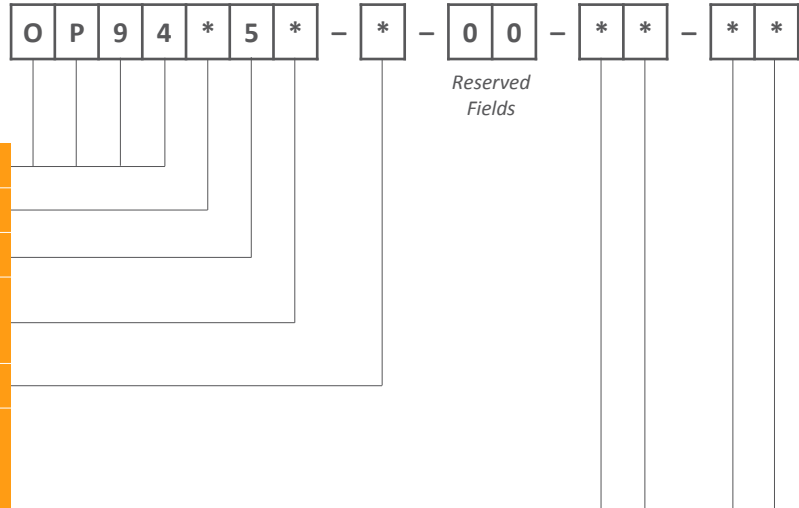

CWDM Field Passive	O
* = M (mux) or D (demux)	P
5-channel Module	9
* = H (5 CWDM channels in "High" Channel Group (1530-1610 nm) L (5 CWDM channels in "Low" Channel Group (1430-1510 nm) V (5 CWDM channels in "Very Low" Channel Group (1270-1350 nm)	4
* = 1310 nm I/O Port (1 = not present, 2 = present) See Note 1	*
**.* = Packaging, Fiber, and Connector Type (All ports are identically connectorized.) R1-00 = Ruggedized package with 1 meter pigtail of 900 µm tight buffered fiber and no connector R2-00 = Ruggedized package with 1 meter pigtail of 2 mm loose tube fiber and no connector R2-AS = Ruggedized package with 1 meter pigtail of 2 mm loose tube fiber and SC/APC connectors	00
	*
	*
	*

Note:
¹ Available on "L" and "H" models only.

RELATED PRODUCTS

Optical Transmitters	Optical Passives
Digital Return	Optical Patch Cords
Optical Nodes	Installation Services

Customer Care

Contact Customer Care for product information and sales:

- United States: 866-36-ARRIS
- International: +1-678-473-5656

Note: Specifications are subject to change without notice.

Copyright Statement: ©ARRIS Enterprises, LLC, 2016. All rights reserved. No part of this publication may be reproduced in any form or by any means or used to make any derivative work (such as translation, transformation, or adaptation) without written permission from ARRIS Enterprises, LLC ("ARRIS"). ARRIS reserves the right to revise this publication and to make changes in content from time to time without obligation on the part of ARRIS to provide notification of such revision or change. ARRIS and the ARRIS logo are registered trademarks of ARRIS Enterprises, LLC. Other trademarks and trade names may be used in this document to refer to either the entities claiming the marks or the names of their products. ARRIS disclaims proprietary interest in the marks and names of others. The capabilities, system requirements and/or compatibility with third-party products described herein are subject to change without notice.