

Headend Optics Platform (CH3000)

CX3002 Communications Module

FEATURES

- SNMP proxy agent monitors modules in CH3000 Chassis and external equipment
- Easy integration with any standard SNMP-compliant NMS
- Provides status, alarms, configuration, and SNMP hosts traps
- Embedded Web server for Web-based management of CH3000 Chassis
- Instruments standards-based SCTE HMS Alarms framework
- Supports ARRIS's Opti-Trace family of management software and third party software over a standard IP network
- Two 10BASE-T ports; second port supports daisy-chaining of CX3002 modules in multiple chassis
- RS-232 port for external device monitoring (with auto-detection of AT1550 Series Transmitters)
- No additional chassis slot required (mounts on top of any power supply from rear of chassis)
- Hot plug-in/out
- Field upgradeable software




PRODUCT OVERVIEW

The CX3002 Communications Module supports the remote configuration and monitoring of modules in the CH3000 Chassis, and monitors the chassis mid-plane alarm line. Mounted on top of any power supply module, it does not require a dedicated slot in the chassis. The CX3002 supports Web-based management of the CH3000 Chassis.

In addition to compatibility with ARRIS’s Opti-Trace software, the module’s SNMP proxy agent enables equipment monitoring and integration with other industry standard NMS solutions. The CX3002 maintains a separate cache of status and configuration information for each active CH3000 module during runtime.

One of the CX3002’s two 10BaseT ports is used to interface with ARRIS’s Opti-Trace family of management software over a standard IP network. The second 10BaseT port can be used to daisy-chain additional CX3002 modules to support monitoring of multiple chassis per site, thus reducing requirements for external hubs. An RS-232 port provides an interface for monitoring of externally connected equipment.

| SPECIFICATIONS | |
|--|--|
| Characteristics | Specification |
| Physical | |
| Dimensions | 8.1” D x 1.7” H x 2.0” W (20.6 cm x 4.3 cm x 5 cm) (Installs in rear of power supply; no separate chassis slot required) |
| Weight | 0.5 lbs (0.23 kg) |
| Environmental | |
| Operating Temperature Range | -20° to +65°C (-4° to 149°F) |
| Storage Temperature Range | -40°C to +85°C (-40°F to +185°F) |
| Humidity | 5% to 95% non-condensing |
| Power Requirements | |
| Input voltage (from chassis mid-plane) | 12 V _{DC} (400 mA) |
| Power consumption | 5 W |
| General | |
| Hot plug-in/out | |
| Management interface | RJ-45 (2 10BaseT ports) |
| Ethernet Ports | |
| Connector type | 8-pin RJ-45 (2 connectors, IN and OUT) |
| Cable length | 328 ft (100 m), CAT-5 compliant |
| Speed supported | 10 Mbps (full duplex) |
| Front Panel | |
| RS-232 Port | external device monitoring with auto-detection of externally connected AT1550 Series Transmitter. (The CLI RS-232 Port is only for factory use.) |
| RESET pushbutton | soft reset and configuration reset |
| Status LEDs | <ul style="list-style-type: none"> Green = OK Yellow = non-service-affecting alarm (or alarm history present) Red = service-affecting alarm |
| ACCESS LED | <ul style="list-style-type: none"> Access = Blue (communications active with chassis mid-plane) |
| Port LEDs | <ul style="list-style-type: none"> LINK = Green Activity = Amber |

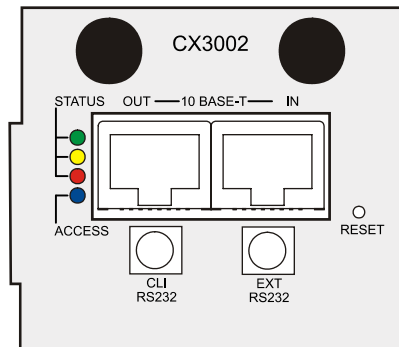


ORDERING INFORMATION

| | | | | | |
|---|---|---|---|---|---|
| C | X | 3 | 0 | 0 | 2 |
|---|---|---|---|---|---|

Communications Module

The CX3002 Communications Module can be installed in either power supply back plate BP-P1 or BP-P2.

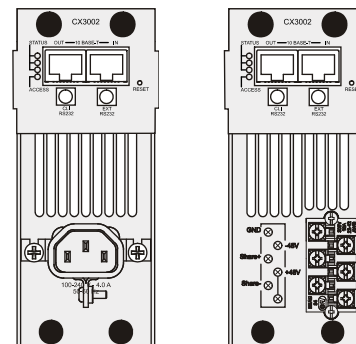

RELATED PRODUCTS

| | |
|----------------|-----------------------|
| CH3000 Chassis | Optical Passives |
| Digital Return | Optical Patch Cords |
| BP Back plates | Installation Services |

Customer Care

Contact Customer Care for product information and sales:

- United States: 866-36-ARRIS
- International: +1-678-473-5656

Note: Specifications are subject to change without notice.

Copyright Statement: ©ARRIS Enterprises, LLC, 2016. All rights reserved. No part of this publication may be reproduced in any form or by any means or used to make any derivative work (such as translation, transformation, or adaptation) without written permission from ARRIS Enterprises, LLC (“ARRIS”). ARRIS reserves the right to revise this publication and to make changes in content from time to time without obligation on the part of ARRIS to provide notification of such revision or change. ARRIS and the ARRIS logo are registered trademarks of ARRIS Enterprises, LLC. Other trademarks and trade names may be used in this document to refer to either the entities claiming the marks or the names of their products. ARRIS disclaims proprietary interest in the marks and names of others. The capabilities, system requirements and/or compatibility with third-party products described herein are subject to change without notice.