

Headend Optics Platform (CH3000)

AT3553, AT3554

Analog 1550 nm Externally Modulated Transmitter (65/85)

FEATURES

- 9.5 dBm minimum output power
- 1 GHz RF bandwidth
- Analog 64-channel PAL B/G plus QAM loading
- 65 km and 100 km path length options
- Multiple broadcast wavelength options (1545 nm or 1563 nm), or optional selection of DWDM ITU- grid channel
- Adjustable SBS suppression
- User-settable RF input level
- AGC Select: CW, Video, Manual (no AGC)
- Front access -20 dB input test point
- LED status indicators
- Front panel Laser On/Off interlock switch and indicators
- Additional back panel "Laser On" indicator
- Hot plug-in/out
- Local and remote status monitoring and management features



PRODUCT OVERVIEW

The ARRIS AT3553 and AT3554 series high performance 1550 nm externally modulated analog transmitters are available in several optional configurations to meet various network requirements. They feature a minimum output power of 9.5 dBm with configurable dBm SBS suppression. The compact design minimizes rack space requirements and permits plugging the three-slot-wide, full-depth transmitter module in either the front or rear of the CH3000 3RU chassis to optimize equipment installation and operating conditions.

Several wavelength options are available to include broadcast center wavelengths at 1545.3 nm or 1563.0 nm, or channel selection on the DWDM ITU grid (ITU-T G.694.1).

The characteristics of the transmitter's source laser allow high carrier-to-noise ratio (CNR) while the proprietary predistortion circuit that drives the optical modulator provides excellent CSO and CTB performance, with 450 MHz of digital channel loading 6 dB below the analog channels. AT3553 and AT3554 series transmitters are digital ready, and can be fully loaded with 100% digital 256QAM signals. This family of transmitters is part of the full complement of products developed by ARRIS to support and enhance the deployment of traditional HFC, passive HFC and fiber-to-the-home (FTTH) networks.

RELATED PRODUCTS

CH3000 Chassis	Optical Patch Cords
Optical Transmitters	Optical Passives
BP Back plates	Installation Services

SPECIFICATIONS


Characteristics	Specification
Physical	
Dimensions	13.0" D x 4.3" H x 3.0" W (3RU) (33 cm x 11 cm x 7.6 cm) (3 chassis slots wide)
Weight	4.0 lbs (1.8 kg)
Environmental	
Operating temperature range	0° to +50°C (32° to 122°F)
Storage temperature range	-40°C to +85°C (-40°F to +185°F)
Humidity	5% to 95% non-condensing
RF and Optical Interface	
Wavelength	<ul style="list-style-type: none"> 1545.3 nm ± 0.9 nm (Broadcast, "BC" models) 1563.0 nm ± 0.9 nm (Broadcast, "BA" models) (DWDM ITU grid available by special order)
Optical connector	SC/APC on standard back plate BP-A9
RF input	F-type (female connector at back plate) BP-A9
RF test point	G-type (male connector at front panel -20 dB)
Power Requirements	
Input voltage	12 V _{DC}
Power consumption	<40 W
General	
Channel plans	64-channel PAL B/G plus QAM loading up to 1002 MHz
Specific link length	65 km or 100 km options
Optical output power, minimum	9.5 dBm
Operating modes	Video and CW (both with AGC), and Manual (without AGC)
Electrical	
Passband	46–1002 MHz
Nominal RF input levels (dBmV/ch, CW)	18 (Manual Mode) / 20 (AGC Modes)
Frequency response flatness (including slope)	± 0.5 dB (46 to 550 MHz), ± 0.75 dB (46 to 1002 MHz)
Input return loss, minimum	17 dB
Level stability	±0.6 dB
AGC range	±3 dB
Manual gain control range	0 to -6.0 dB
Manual gain control step size	0.25 dB

		NTSC	
Performance over Operating Temperature Range		65 km (AT3553A **_*_**)	100 km (AT3554A **_*_**)
SBS Suppression, Variable	dBm	14-18	12-16
Carrier-to-noise Ratio (CNR) ¹ In band (85–598 MHz)	dB	53	51.5
Composite Second Order (CSO) ² In band (85–598 MHz)	dB	67	65
Composite Triple Beat (CTB) In band (85–598 MHz)	dB	66	64
Cross Modulation (XMOD)	dB	65	64

¹ 64 PAL B/G analog channels (5 MHz NBW) up to 598 MHz. CNR degradation ≤ 1.5 dB with 400 MHz QAM signal loading, 6 dB below analog channels, up to 1002 MHz.
² All values are specified with unmodulated carriers of equal power at the input of the transmitter.

Status Indicators, Alarms and Monitoring	
	Front panel LEDs (Laser On/Off and Alarms)
	Local and remote status monitoring via ARRIS Opti-Trace applications
	Firmware download capability by local serial port

ORDERING INFORMATION

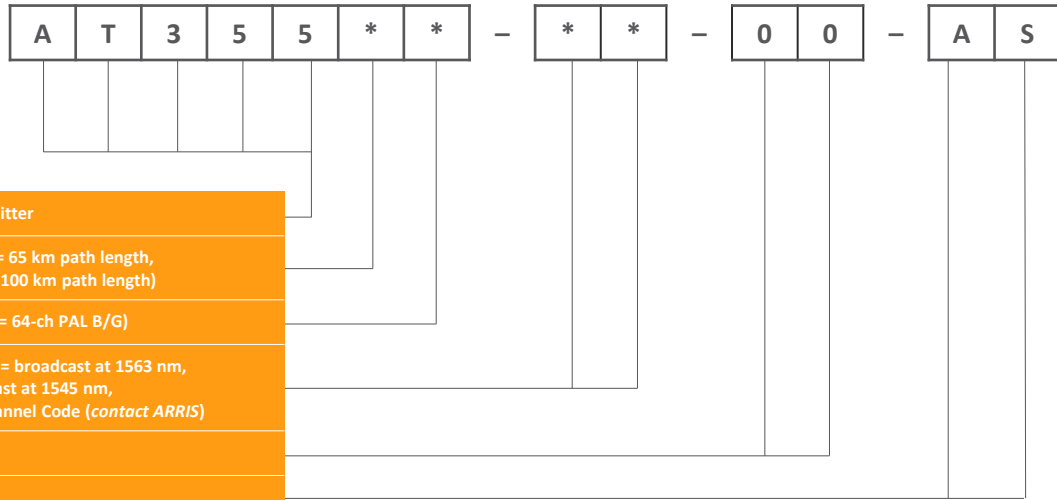

Required Module Back Plate

(Included with order)



Customer Care

Contact Customer Care for product information and sales:

- United States: 866-36-ARRIS
- International: +1-678-473-5656

Note: Specifications are subject to change without notice.

Copyright Statement: ©ARRIS Enterprises, LLC, 2016. All rights reserved. No part of this publication may be reproduced in any form or by any means or used to make any derivative work (such as translation, transformation, or adaptation) without written permission from ARRIS Enterprises, LLC ("ARRIS"). ARRIS reserves the right to revise this publication and to make changes in content from time to time without obligation on the part of ARRIS to provide notification of such revision or change. ARRIS and the ARRIS logo are registered trademarks of ARRIS Enterprises, LLC. Other trademarks and trade names may be used in this document to refer to either the entities claiming the marks or the names of their products. ARRIS disclaims proprietary interest in the marks and names of others. The capabilities, system requirements and/or compatibility with third-party products described herein are subject to change without notice.