


# Optical Passives (ISP)

## NP31F08S06 Octal RFoG Filter

### FEATURES

- Enables deployments of RFoG applications when used with OR3144H receivers
- Eight RFoG filters in a single high density module
- One module supports two AR3044H analog quad receiver modules
- 3-port filters combine or separate 1550nm forward Broadcast signals from 1610 RFoG return  $\lambda$ 's
- LC/APC connectors provide high density and performance
- Low insertion loss
- Totally passive module
- Simplifies RFoG installation and reduces rack space requirements
- Occupies one half-depth slot in CH3000 chassis

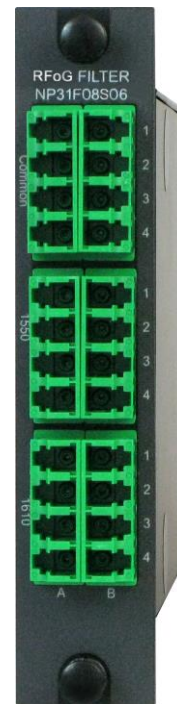

### PRODUCT OVERVIEW


ARRIS NP31F08S06 Octal RFoG diplex filter module provides eight 3-port combiner/separators that combine (or separate) 1550 nm forward signal inputs from 1610 nm RFoG return wavelengths. The module is designed to complement two AR3044H RFoG Analog Quad Return Receiver modules to readily support up to eight RFoG optical network segments.

High density packaging enables network operators to install up to nine “groups” (each comprising a single NP31F08S06 Filter side-by-side with two AR3044H modules) in a single 3RU chassis, and thus providing support for up to 56 RFoG network segments per chassis. Assuming 32 CPEs per network segment, a single chassis can thus support deployments to almost 1,800 residences.

The filter is packaged in an LGX compatible module and can be mounted in the CH3000 chassis, occupying one half-depth slot. The compact design minimizes rack space requirements in headends or hubs and enhances deployment of fiber-to-the-home (FTTH) networks. Additionally, the compact single-width module design can be plugged in either the front or rear of the CH3000 3RU chassis to optimize equipment installation and operating conditions. It is designed to be used in controlled indoor environments within a temperature range of -20° to +65°C.

## SPECIFICATIONS

Characteristics	Specification
<b>Physical</b>	
Dimensions	6.6" D x 4.3" H x 1.0" W (3RU) (16.7 cm x 11 cm x 2.5 cm)
Weight	1.5 lbs (0.68 kg)
<b>Environmental</b>	
Operating temperature range	-20° to +65°C (-4° to +149°F)
Storage temperature range	-40° to +85°C (-40° to +185°F)
Humidity	5% to 95% non-condensing
<b>Optical Interface</b>	
BC INP to Access Network (downstream)	<ul style="list-style-type: none"> <li>Passband: 1525 – 1564.3 nm</li> <li>Insertion loss (including connectors), max: 1.3 dB</li> <li>Isolation of 1550 nm to 1610 nm, min: 50 dB</li> </ul>
Access Network to O/E (upstream)	<ul style="list-style-type: none"> <li>Passband: 1260 – 1530 nm and 1570 – 1620 nm</li> <li>Insertion loss (including connectors), max: 1.2 dB</li> <li>Isolation of 1610 nm to 1550 port, min: 30 dB</li> </ul>
Return loss, min	45 dB
Power handling, max (any input port)	21.8 dBm
<b>Connectors</b>	
Total 24 LC/APC connectors	<ul style="list-style-type: none"> <li>8 Common for Access Network (ports A1-A4 and B1-B4)</li> <li>8 1550 (for BC ports A1-A4 and B1-B4)</li> <li>8 1610 (for RFoG Upstream, ports A1-A4 and B1-B4)</li> </ul>

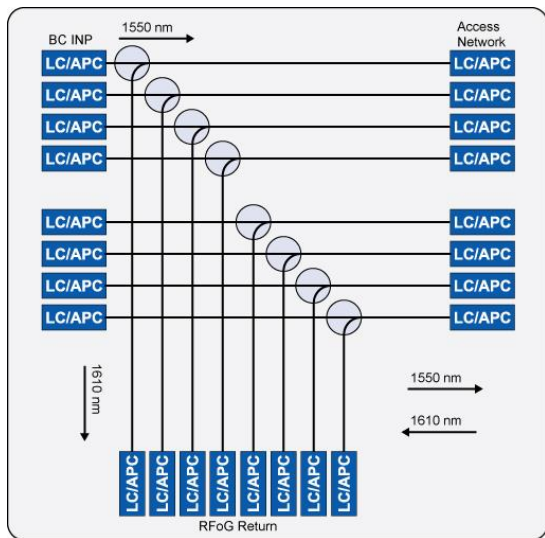

## ORDERING INFORMATION

Part Number

NP31F08S06A05-0LA-AL

## RELATED PRODUCTS

CH3000 Chassis	Optical Patch Cords
Optical Return Receivers	Optical Passives
HPON™ / RFoG	Installation Services

## Customer Care

Contact Customer Care for product information and sales:

- United States: 866-36-ARRIS
- International: +1-678-473-5656

**Note:** Specifications are subject to change without notice.

**Copyright Statement:** ©ARRIS Enterprises, LLC, 2016. All rights reserved. No part of this publication may be reproduced in any form or by any means or used to make any derivative work (such as translation, transformation, or adaptation) without written permission from ARRIS Enterprises, LLC ("ARRIS"). ARRIS reserves the right to revise this publication and to make changes in content from time to time without obligation on the part of ARRIS to provide notification of such revision or change. ARRIS and the ARRIS logo are registered trademarks of ARRIS Enterprises, LLC. Other trademarks and trade names may be used in this document to refer to either the entities claiming the marks or the names of their products. ARRIS disclaims proprietary interest in the marks and names of others. The capabilities, system requirements and/or compatibility with third-party products described herein are subject to change without notice.